

# Information Technologies Used In Electric Public Vehicles

NUCA Ilie<sup>1</sup>, NUCA Iurie<sup>2</sup>, MOTROI Alexandr<sup>3</sup>, EȘANU Vitalie<sup>4</sup>

<sup>1</sup>Technical University of Moldova/Department of Electromechanics, Chișinău, Moldova, nuca\_ilie@yahoo.com

<sup>2</sup>ÎTS Informbusiness SRL/Department of electric traction, Chișinău, Moldova, nuca.iurie@gmail.com

<sup>3</sup>Informbusiness SRL/Department of electric traction, Chișinău, Moldova, amotroi@informbusiness.md

<sup>4</sup>Informbusiness SRL/Department of electric traction, Chișinău, Moldova, vne@informbusiness.md

**Abstract** — This paper is a summary of the use of information technologies in urban passenger electric vehicles, largely based on the authors' experience in developing and implementing traction systems for trams and trolleybuses. Traction control systems of the electric vehicle are made on high performance programmable microprocessors, with PWM control algorithms for power IGBT converters and vector control methods for optimal energy consumption. Simultaneously it ensures diagnostics, monitoring and protection of all components; stores the current state of the elements; and provides information means for the driver and passengers. Besides traction, information technology is present also in forming smart or even driverless vehicles. Technologies such as GPS and Wireless Networking allows optimizing urban transport.

**Keywords** —electric public vehicle, electric traction, motor, IT, control, microprocessor, communication protocol, CAN, efficiency, comfort.

## 1. INTRODUCTION

Theoretically, information technology (IT) is a technology of information management based on computers and telecommunications. Information management is collecting, transmitting, storing and processing information.

In present, IT is present in all of human activities; it has transcended the limited use of technology and now may be referred to as an undividable part of society.

The computer is an electronic device, which is programmed to carry out sets of logic and arithmetic operations. Subsequently a computer based information system consists of two parts (fig.1): hardware and software. The hardware is the system of physical devices which form the computer itself, but which cannot function without the second part – software. Software is the program that processes information and the operating information itself.

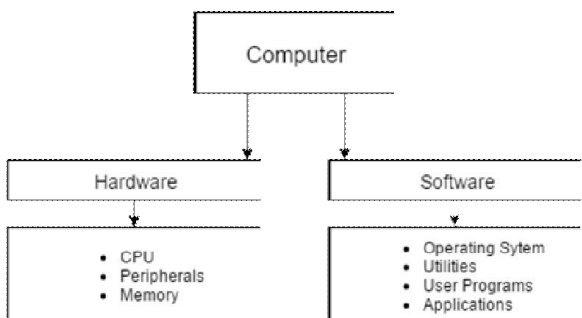


Fig. 1. Structure of a computer system

An isolated computer has naturally limited access to information, while more could change information between

them. A system that connects computers is called a network (fig.2). The data transmission can be made through regular cables or wirelessly. There are many types of networks [1], some of those are Local Area Network (LAN), global network (Internet), or Controller Area Network (CAN).

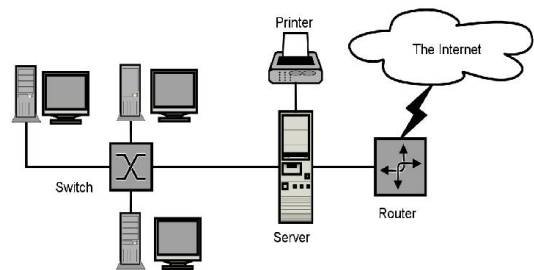


Fig. 2. An interconnected LAN network with a global one, the Internet

The software and hardware combine to make the most performant processing device in human history. The performance of the computer system depends on each part's performance individually, and theirs is in turn interconnected. For example to have a fast processing of a complex program one needs to have performant hardware: a high frequency CPU and memory to match it. However, a well designed and engineered software can make best use of available hardware [2].

One of the most prominent field derived from the basic science of information technology, computer science, is robotics [3]. Robotics is the field combining mechanical and electrical engineering, and computer science that focuses on the design, construction and application of robots; and computer systems for their control, including feedback from sensors and information processing. In modern industry (fig.2) and agriculture, processes tend to be more and more automatized, which means a wider use of robots and automation systems. IT and information management plays a vital role in robotics. The data gathered by sensors must be transformed into information and processes in order for the actuators, usually electrical machines, to do their job properly and to maximum efficiency.

In the area of robotics and IT was started the concept of Artificial Intelligence (AI) [4]. This concept is described as designing and engineering machines capable of intelligent response to external factors.

The advantages that come with vast implementation of information technology in all of human activities are based on processing and transmitting information. Ultimately, this leads to increased efficiency of processes in common spheres like economy, medicine, education, industry, transport and day-to-day life.



The information system existing in the vehicles is the part of data transmitting and processing. A good example of such system is the CAN and CAN bus (fig.5) [13]. Microcontrollers are dedicated computational devices of limited functions, which are perfect for specific applications [14]. Microcontrollers process data, while the bus ensures data transmission between network access points. At any time in the CAN bus may be as many as 2000 signals, which microcontrollers can access at any time [12].

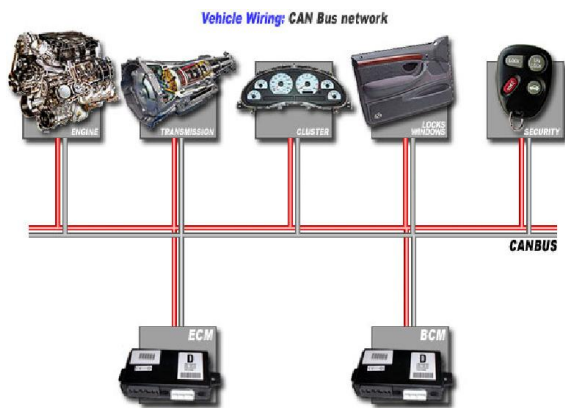


Fig. 5. Example of a system with CAN bus communication protocol

The sensor system of a car has mainly safety and legal objectives. A car must always monitor the emissions, as to not be extra-polluting, according to the law. Sensors also monitor vital car parameters like oil pressure, engine and coolant temperature or exhaust emissions. If some of these parameters are outside of admissible ratings, the driver is informed through visual and audio signals. Modern information systems also store the acquired data, for later analysis by specialized personnel. This allows specialists to analyse and determine the cause of technical issues, and remove any abnormalities of a car's functioning.

Besides safety and legal reasons, there is also the luxury motive in car electronics. Rolling windows, parking sensor, air conditioning; functions such as these make travelling by car very comfortable, and less tiring.

Traction control is a matter of efficiency and power. This makes monitoring and controlling the function of the engine vital. In combustion engines and in electric motors different factors affect the torque and performance of vehicle movement. For combustion engines fuel and oxygen proportion and timing of injection lead to the magnitude of developed torque and rotation speed of the shaft. A specialized controller the timing and dose of fuel injector, according to a programmed diagram, and depending on the level of gas pedal.

For electric cars, it is a more difficult task, to control the torque. One of the reasons for that is the multitude of electric motors types [16, 18], but in electric vehicles mostly are used the Asynchronous Motor (AM), Brushless Direct Current Motor (BLDC), Direct Current Motor (DCM) and, recently, Switched Reluctance Motor (SRM) [17, 30]. The particularities of each of these motors require for individual electronic devices and control algorithms of voltages and currents to have a quality control of torque [19].

Of all electric motors, the one to be spread the most in public electric traction, is the AM; while for personal vehicles the more common one is BLDC. The reasons for this trend are high energy density, reliability and efficiency, with appropriate control. The difficulty in implementing AM and

BLDC for traction is they require power electronics, like an inverter, and intelligent control. Basically they require extra electronic devices and a more sophisticated software engineering for control.

The most forward control method for the AM is Field Oriented Control [20], though Direct Torque Control is catching up fast due to its easy application in traction.

As for the BLDC, the inverter has to operate in such a form, that the succession of triggered semiconductors make the optimal rotor speed, at required torque.

Electric vehicles also require management of power supply. For autonomous electric vehicles, there must be an intelligent power management system that would monitor and balance the charge of batteries. An unbalanced battery system for electric vehicles causes malfunctions and faster deterioration of individual batteries. For vehicles that do not have an autonomous power source, like trolleybuses and trams, there needs to be permanent monitoring of supply voltage. Fluctuations of supply voltages may appear of many reasons, and if the vehicle is not protected, it may be damaged.

An informational system present in many vehicles nowadays is the GPS (Global Positioning System). It allows a device to determine its relative position on the globe, in reference to several satellites and a stationary point on Earth. Modern vehicles have built-in computers and displays which have the option of GPS navigation. For public electric vehicles a GPS system is useful by determining and exact position of the vehicle, information that passengers can access freely.

IT is also present in vehicles in media form: displays, audio systems, cameras and interactive displays (fig.6). In public electric vehicles displays are used to show commercials, which can add revenue to the administration of public transport; and audio devices are used to inform passengers about the route, or simply play ambient music.



Fig. 6. Driver's informational panel on Tesla Model S

One of the most advanced electric cars is made by Tesla [21] (fig.7). Besides advanced traction control using two motors, it has a very advanced form of autopilot. Its computer can analyse the surroundings on the road with a radar. The benefit of it is that the computer can determine the surrounding regardless of visibility factors like fog and rain. Besides the radar, the Tesla car has video cameras with image recognition and a 360 degree sonar. All these systems were implemented to make possible the autopilot. A computer that knows the surroundings, with appropriate algorithms, can drive without the action of driver.



Fig. 7. Tesla Model S

Tesla cars, along with an overwhelming majority of hybrid or pure electric vehicles, use BLDC [30]. The functioning of these motors is useless without an inverter and intelligent control. Intelligent control allows developing exactly the necessary mechanical characteristics at the shaft of the motor, so the vehicle moves accordingly to the driver's action on the gas pedal.

### 3. THE SDMC URBAN ELECTRIC VEHICLE CONTROL SYSTEM

Information technology touched all the elements of command system for electric city transport. Elements such as the control of the electric motor traction system, diagnostics, system monitoring and passenger information are some of the most common.

A more progressive use of IT in electric transport is V2X communication (vehicle-to-x). It includes vehicle-to-vehicle (V2V), vehicle-to-infrastructure (V2I) and vehicle-to-pedestrian (V2P). Such networks are connected via wireless communications. In combination with GPS technology, V2X leads to create smart transportation grids (fig.8) and driverless vehicles [31, 32].



Fig. 8. Intelligent transportation system with V2X communication

“Informbusiness”, a local company, developed its own control systems for electric city transport, the SDMC series [34]. These control systems were developed mainly for trolleybuses and trams, on AC or DC motors. The SDMC is an intelligent modular system (fig.9), with CAN bus communication between the modules. Each module has its own Fujitsu microprocessor on 32 bit Fujitsu, such as the traction control processor MB91F467 [26].

The SDMC system is divided in two parts: the power module, and peripheral devices. The power module is an intelligent system, whose main task is the control of traction and monitoring of the power system inside the vehicle. The most advanced control system is used for AC motors. The

motor is controlled with Field Oriented Control (FOC) [30] algorithms, which ensure a precise control of torque when accelerating or braking, and also has implemented the regenerative braking feat. The monitoring of the power system goes from the supply lines, to the inverter and, lastly, to the motor. For a fast response, the functions of traction and monitoring are done by separate processors from Fujitsu [26]. The monitoring processor evaluates the state of the system non-stop and performs protective measures if necessary.



Fig. 9. SDMC-103-03 trolleybus control system

The most advanced system at Informbusiness is the SDMC-103-03. Its main features are:

- Dual-core modules with MB91F267 and MB91F467 processors
- The power module is controlled by the MB96F356 processor
- LCD graphic module with JADE MB86-R01 video processor
- CAN communication protocol inside the system
- FOC for traction AM

Currently the SDMC-103-03 control system works with the PBG (fig.10, 11). PBG is an on-board panel based on Fujitsu graphic microprocessor [29]. It is a technology of software development on Windows, CE and Linux operating systems. The panel has a JADE MB86R-01 processor, dedicated to graphic software [26]. The PBG module permits the connection of media peripherals like analogue cameras and speakers.

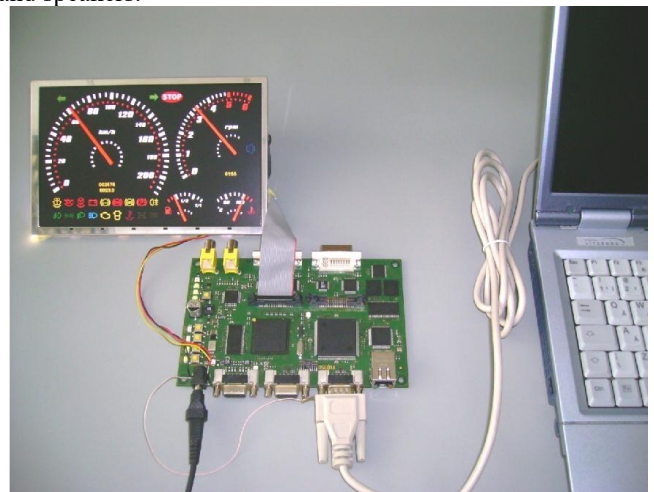


Fig. 10. Programming of Jade based graphic interface PBG



Fig. 11. PBG on-board driver's panel

Currently there is an experimental graphic module being developed, based on LIME processor (fig.12). It is designed to be compatible with older communication systems and graphic modules. The graphic core processor is graphic display controller LIME MB86276 of Fujitsu [29]. The display used for the new panel is TFT LCD 8.4" Hitachi display.



Fig. 12. Experimental on-board panel based on Fujitsu "Lime" MB86276

One of the most important features that the SDMC-103-03 trolleybus control system has is the advanced control. The engineers have designed the system to feed a 3 phased AM, through an inverter, and controlled with FOC (commonly referred to as vector control) method [20].

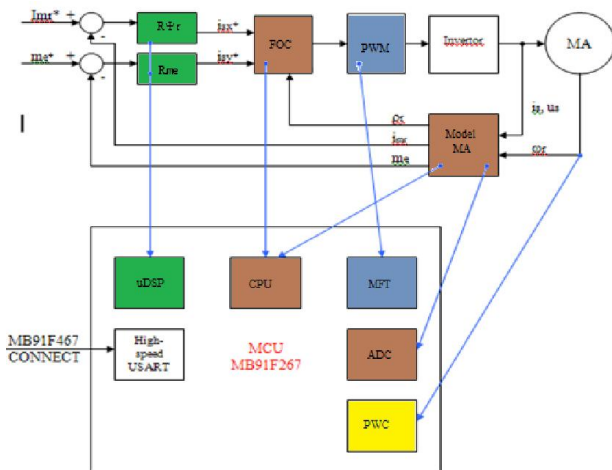


Fig.13 Division of MB91F267 processor resources in FOC

The division of the MB91F267 processor's resources to control (fig.13) are as follows:

- ADC converts analogue signals into digital
- MFT – multifunctional timer that forms a high frequency PWM
- PWC – calculates the speed of the rotor
- uDSP – PI control
- CPU – state observer of Model MA and FOC controller
- Flash memory – storage of software
- RAM – storage of variables and motor parameters

CAN bus requires a CAN controller on each node of the network (fig.14). The microprocessors from Fujitsu are connected to the CAN network through an MCP2551 chip. The MCP2551 is a high speed CAN transceiver, whose main function is to decode the data on the CAN bus into a form that the processor can understand. In the case of SDMC equipment, there are 2 CAN busses, of which one is for back-up.

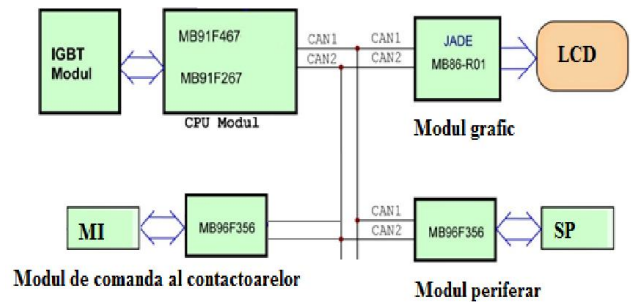


Fig. 14. The communication system of SDMC103-03

Comparing to the classic rheostat command and DC drives, which were used almost exclusively a few decades ago, modern control algorithms present the advantage of higher efficiency and reliability (fig.15). The graph shown in fig.16 represents the efficiency of DC traction with an electronic control, of the SDMC-103-01; and old rheostat command previously implemented in the same ZIU-9 trolleybus.

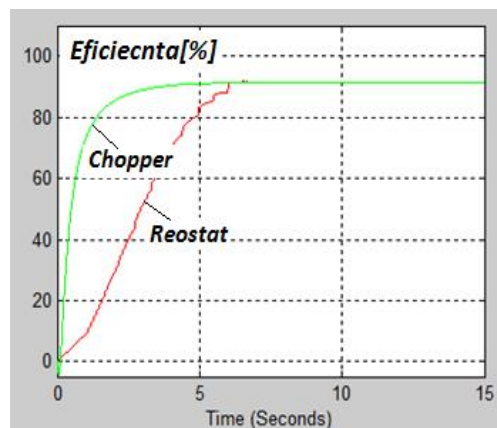


Fig. 15. Efficiency of electronic and rheostat commands

To improve the comfort of travel, the following factors were implemented in the SDMC control systems:

- Setting optimal control and energy consumption
- Eliminating inertial shocks
- LCD information panels for passengers

- AUDIO speakers information
- Implementing Wi-Fi access to internet (testing)
- GPS monitoring of public transportation, with internet access (testing)

## REFERENCES

Even though today there exist technologies that allow vehicles to control themselves, driverless vehicles are a thing of the future. The main reasons for that are safety and ideology. It is a new technology, but on which many lives could depend, thus it has to pass a longer testing period. Developers do not hesitate to implement and test them. A clear example for that is the VAL (VAL - Véhicule Automatique Léger) from Siemens (fig. 17) [32]. Siemens created two types of vehicles: Cityval and Airval. These are completely driverless light railway vehicles, controlled by operators from a distance. Operators that could be situated in a single control centre. Such systems would allow an efficient traffic control, and synergy of an entire city railway system; thus making transportation through cities faster and more reliable.



Fig. 17. Cityval, Siemens' driverless light railway vehicle

## 4. CONCLUSIONS

IT is a modern technology that greatly improves the functioning of an electric vehicle. Using powerful microprocessors and complex control algorithms allows the vehicle to work at high efficiency rating. As comparison to old DC drives with rheostat command, modern control algorithms raise the efficiency with an average of 30%. Or the possibility to use BLC motors for traction, motors which have a power factor of 1 and are of top efficiency and energy density.

Another major factor that benefits from implementing IT in vehicles, public or private, is safety. Using a multitude of sensors, such as radar, sonar, or laser; computers inside vehicle can determine factors of risk and inform drivers, or act independently if the driver can not react in due time.

Using GPS and wireless communications, the intelligent vehicle can become part of an intelligent transportation system. A network such as this would greatly diminish the risks that appear on the road due to factors like low visibility, or human factor; and thus greatly reduce the number of accidents on the road. If the vehicle computers become more and more advanced, all signs show that the transportation will grow to be driverless. Driverless transportation will start in railway transportation, due to the fact that rail vehicles have a prescribed path; and later grow into the roads.

IT also allows to implement luxury elements in vehicles. Video and audio announcements, media entertainment or access to the internet via Wi-Fi can make riding public transport very comfortable.

- [1] <http://study.com/academy/lesson/types-of-networks-lan-wan-wlan-man-san-pan-epn-vpn.html>
- [2] "Importance and Contribution of Software Engineering to the Education of Informatics Professionals". Dr. Tick József. Budapest Polytechnic, Hungary
- [3] <http://engineering.nyu.edu/mechatronics/smart/pdf/Intro2Robotics.pdf>
- [4] Artificial Intelligence - A Modern Approach. Stuart J. Russell and Peter Norvig
- [5] Information Technology and the Networked Economy. Patrick McKeown
- [6] [http://www.diffen.com/difference/3G\\_vs\\_4G](http://www.diffen.com/difference/3G_vs_4G)
- [7] <http://www.gartner.com/newsroom/id/2504915>
- [8] "The Essential Physics of Medical Imaging". B ushburg, Jerrold; Anthony Seibert; Edwin Leidholdt; John Boone (2002).. USA: Lippincott Williams & Wilkins. p. 116.
- [9] "Magnetic Resonance, a critical peer-reviewed introduction". European Magnetic Resonance Forum. Retrieved 17 November 2014
- [10] "Comprehensive Experimental Analyses of Automotive Attack Surfaces". Stephen Checkoway, Damon McCoy, Brian Kantor
- [11] "A Smarter Computer Controlled Model Car". Brian W. Grasby
- [12] <http://www.popularmechanics.com/cars/how-to/a7386/how-it-works-the-computer-inside-your-car/>
- [13] <http://www.kvaser.com/software/7330130980914/V1/can2spec.pdfA>
- [14] [http://www.ti.com/lscds/ti/microcontrollers\\_16-bit\\_32-bit/overview.page](http://www.ti.com/lscds/ti/microcontrollers_16-bit_32-bit/overview.page)
- [15] <https://mobiloil.com/en/article/car-maintenance/basic-car-maintenance-tips/understanding-your-vehicles-sensors>
- [16] <http://www.electrical-knowhow.com/2012/05/classification-of-electric-motors.html>
- [17] Il.Nuca, V.Eşanu. Iu.Nuca., Iu. Rîmbu, P.Todos. "Recent state and trends in the electric urban vehicles' traction" 4-th International Symposium on Electrical Engineering and Energy Converters. September 22-23, 2011, Suceava
- [18] <http://www.ece.uah.edu/courses/material/EE410-Wms2/Electric%20motors.pdf>
- [19] <http://www.pacontrol.com/download/Electric-Motor-Controls-Tutorial.pdf>
- [20] Iu. Rîmbu, V. Eşanu, V. Mihalachi, A. Rîncău, Il. Nuca, S. Ivanov. Implementation of the vector control system for traction asynchronous motors. Proceedings of the 8 International Conference on Electromechanical and Power Systems, Craiova-Chişinău-Iaşi, 13-15 october, 2011, pp.132-137
- [21] Il.Nuca, V.Eşanu, A.Motroi, Iu.Nuca. Microprocessor control system of the SDMC-103 electronic equipment for DC trolleybus traction. Bucureşti: Buletinul AGIR nr.4/2012, pp.165-170.
- [22] [http://www.nycsubway.org/wiki/The\\_New\\_York\\_Subway:\\_Chapter\\_06,\\_Electrical\\_Equipment\\_of\\_Cars](http://www.nycsubway.org/wiki/The_New_York_Subway:_Chapter_06,_Electrical_Equipment_of_Cars)
- [23] Il.Nuca, V.Eşanu. Iu.Nuca. "Energetic efficiency of the trolleybus' direct current traction system with electronic control". Technical-scientific conference of the Technical University of Moldova's students, PhDs and collaborators.2012
- [24] Il.Nuca, V.Eşanu, Al.Motroi Iu.Nuca. "Upgrade of direct current traction systems for the 71-605 tram". International conference and exposition on Electrical and Power Electronics. 2014
- [25] <http://www.fujitsu.com/downloads/MICRO/fma/pdf/fmcu/ds91F467DA-v1.00.pdf>
- [26] <https://www.fujitsu.com/us/Images/MB86R01.pdf><http://www.teslamotors.com/>
- [27] [http://www.trans-electro.ru/eng/index\\_eng.html](http://www.trans-electro.ru/eng/index_eng.html)
- [28] <https://www.jadeworld.com/products-and-services/jade-technologies/>
- [29] <http://www.teslamotors.com/blog/induction-versus-dc-brushless-motors>
- [30] [http://www.its.dot.gov/press/its\\_images.htm](http://www.its.dot.gov/press/its_images.htm)
- [31] <http://docs.lib.purdue.edu/cgi/viewcontent.cgi?article=1455&context=roadschool>
- [32] <https://www.mobility.siemens.com/mobility/global/SiteCollectionDocuments/en/rail-solutions/automated-people-mover/airval-cityval-en.pdf>
- [33] Peter Vas, *Sensorless Vector and Direct Torque Control*. Oxford University Press, 1998.
- [34] [http://www.trans-electro.ru/eng/index\\_eng.html](http://www.trans-electro.ru/eng/index_eng.html)